

Tikhonov Regularization in General Form §8.1

To introduce a more general formulation, let us return to the continuous formulation of the first-kind Fredholm integral equation.

In this setting, the residual norm for the generic problem is

$$R(f) = \left\| \int_0^1 K(s, t) f(t) dt - g(s) \right\|_2 .$$

In the same setting, we can introduce a *smoothing norm* $S(f)$ that measures the regularity of the solution f . Common choices of $S(f)$ belong to the family given by

$$S(f) = \|f^{(d)}\|_2 = \left(\int_0^1 (f^{(d)}(t))^2 dt \right)^{1/2}, \quad d = 0, 1, 2, \dots,$$

where $f^{(d)}$ denotes the d th derivative of f .

General Form Contd.

Then we can write the Tikhonov regularization problem for f in the form

$$\min \{ R(f)^2 + \lambda^2 S(f)^2 \}, \quad (1)$$

where λ plays the same role as in the discrete setting.

The previous discrete Tikhonov formulation is merely a special version of this general Tikhonov problem with $S(f) = \|f\|_2$.

We obtain a general version by replacing the norm $\|x\|_2$ with a discretization of the smoothing norm $S(f)$, of the form $\|Lx\|_2$, where L is a discrete approximation of a derivative operator.

The Tikhonov regularization problem in *general form* is thus

$$\min_x \{ \|Ax - b\|_2^2 + \lambda^2 \|Lx\|_2^2 \} .$$

The matrix L is $p \times n$ with no restrictions on the dimension p .

A Transformation to Standard Form

If L is invertible, such that L^{-1} exists, then the solution can be written as

$$x_{L,\lambda} = L^{-1}\bar{x}_\lambda$$

where \bar{x}_λ solves the standard-form Tikhonov problem

$$\min_{\bar{x}} \{ \|(A L^{-1}) \bar{x} - b\|_2^2 + \lambda^2 \|\bar{x}\|_2^2 \}.$$

The multiplication with L^{-1} in the back-transformation $x_\lambda = L^{-1}\bar{x}_\lambda$ represents integration, which yields additional smoothness in the Tikhonov solution, compared to $L = I$.

The same is also true for more general rectangular and non-invertible smoothing matrices L .

More About L

Similar to the standard-form problem obtained for $L = I$, the general-form Tikhonov solution $x_{L,\lambda}$ is the solution to a linear least-squares problem:

$$\min_x \left\| \begin{pmatrix} A \\ \lambda L \end{pmatrix} x - \begin{pmatrix} b \\ 0 \end{pmatrix} \right\|_2.$$

The solution $x_{L,\lambda}$ is unique when the coefficient matrix has full rank, i.e., when the null spaces of A and L intersect trivially:

$$\mathcal{N}(A) \cap \mathcal{N}(L) = \emptyset.$$

Since multiplication with A represents a smoothing operation, it is unlikely that a smooth null vector of L (if L is rank deficient) is also a null vector of A .

Various choices of the matrix L are discussed in §8.2.

Common L 's

Two common choices of L are the rectangular matrices

$$L_1 = \begin{pmatrix} -1 & 1 & & \\ & \ddots & \ddots & \\ & & -1 & 1 \end{pmatrix} \in \mathbb{R}^{(n-1) \times n}$$

$$L_2 = \begin{pmatrix} 1 & -2 & 1 & & \\ & \ddots & \ddots & \ddots & \\ & & 1 & -2 & 1 \end{pmatrix} \in \mathbb{R}^{(n-2) \times n}$$

which represent the first and second derivative operators.

In Reg. Tools use `get_1(n,1)` and `get_1(n,2)` to compute these matrices.

Thus, the discrete smoothing norm $\|Lx\|_2$, with L given by either I , L_1 or L_2 , represents the continuous smoothing norms $S(f) = \|f\|_2$, $\|f'\|_2$, and $\|f''\|_2$, respectively.

Illustration

To illustrate the improved performance of the general-form formulation, consider a simple ill-posed problem with missing data.





Let x be given as samples of a function, and let the right-hand side be given by a subset of these samples, e.g.,

$$b = Ax, \quad A = \begin{pmatrix} I_{\text{left}} & 0 & 0 \\ 0 & 0 & I_{\text{right}} \end{pmatrix},$$

where I_{left} and I_{right} are two identity matrices.

The figure next page shows the solution x (consisting of samples of the sine function), as well as three reconstructions obtained with the three discrete smoothing norms $\|x\|_2$, $\|L_1 x\|_2$ and $\|L_2 x\|_2$.

The first choice is bad: the missing data are set to zero, in order to minimize the 2-norm of the solution. The choice $\|L_1 x\|_2$ produces a linear interpolation in the interval with missing data, while the choice $\|L_2 x\|_2$ produces a quadratic interpolation here.

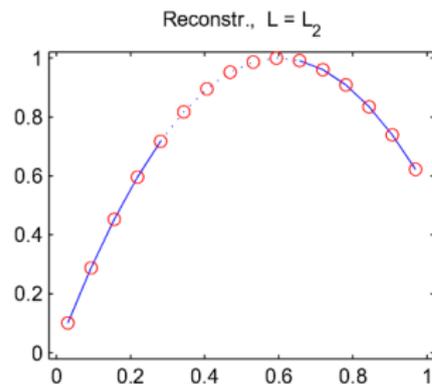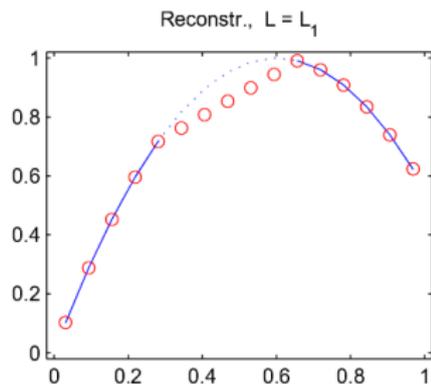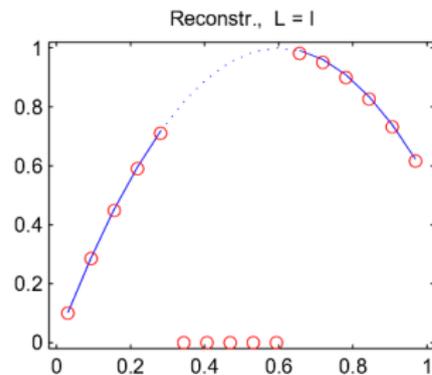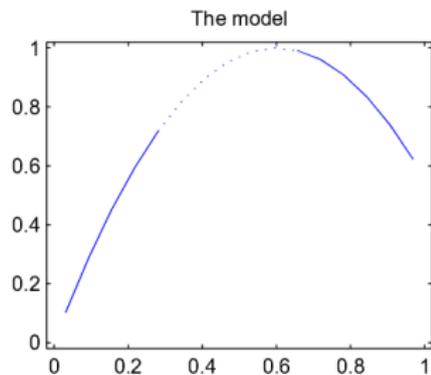

Moving Away From the 2-Norm §8.6

Tikhonov is based on penalizing the 2-norm of the solution:

$$\min_x \{ \|Ax - b\|_2^2 + \alpha^2 \|x\|_2^2 \}.$$

The same is true for TSVD, which can also be formulated as


$$\min \|x\|_2 \quad \text{subject to} \quad \|A_k x - b\|_2 = \min, \quad A_k = \sum_{i=1}^k u_i \sigma_i v_i^T.$$

It is the 2-norm penalization, together with the spectral properties of the SVD basis vectors, that cause a bad reconstruction of the edges = discontinuities.

It turns out that it is a better idea to involve the derivative of the solution **and** another norm!

So what is a good smoothing norm $S(f)$?

An Example Using a Continuous Function

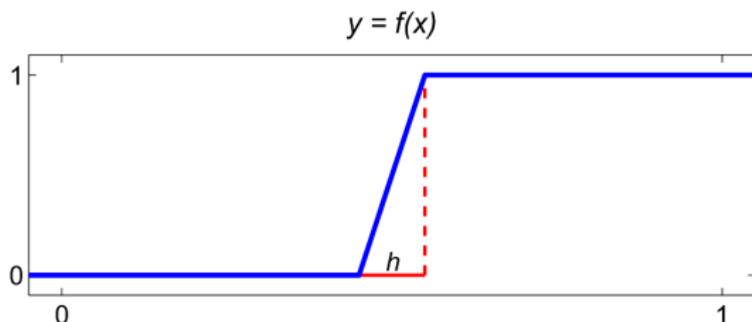

Consider the piecewise linear function

$$f(t) = \begin{cases} 0, & 0 \leq t < \frac{1}{2}(1-h) \\ \frac{t}{h} - \frac{1-h}{2h}, & \frac{1}{2}(1-h) \leq t \leq \frac{1}{2}(1+h) \\ 1, & \frac{1}{2}(1+h) < t \leq 1 \end{cases}$$

which increases linearly from 0 to 1 in $[\frac{1}{2}(1-h), \frac{1}{2}(1+h)]$.

Norms of the First Derivative

It is easy to show that the 1- and 2-norms of $f'(t)$ satisfy

$$\|f'\|_1 = \int_0^1 |f'(t)| dt = \int_0^h \frac{1}{h} dt = 1,$$
$$\|f'\|_2^2 = \int_0^1 f'(t)^2 dt = \int_0^h \frac{1}{h^2} dt = \frac{1}{h}.$$

Note that $\|f'\|_1$ is independent of the slope of the middle part of $f(t)$, while $\|f'\|_2$ penalizes steep gradients (when h is small).

- The 2-norm of $f'(t)$ will not allow any steep gradients and therefore it produces a smooth solution .
- The 1-norm, on the other hand, allows some steep gradients – but not too many – and it is therefore able to produce a less smooth solution, and even a discontinuous solution.

Total Variation (TV) Regularization

The example motivates us to replace Tikhonov's 2-norm with the 1-norm of the first derivative, which is known as the *total variation*.

In the discrete setting:


$$\min_x \{ \|Ax - b\|_2^2 + \alpha^2 \|Lx\|_1 \},$$

where

$$L = \begin{pmatrix} -1 & 1 & & \\ & \ddots & \ddots & \\ & & -1 & 1 \end{pmatrix} \in \mathbb{R}^{(n-1) \times n}$$

such that $\|Lx\|_1$ approximates the total variation $\|f'\|_1$.

The figure on the next page shows a good TV reconstruction to the barcode problem.

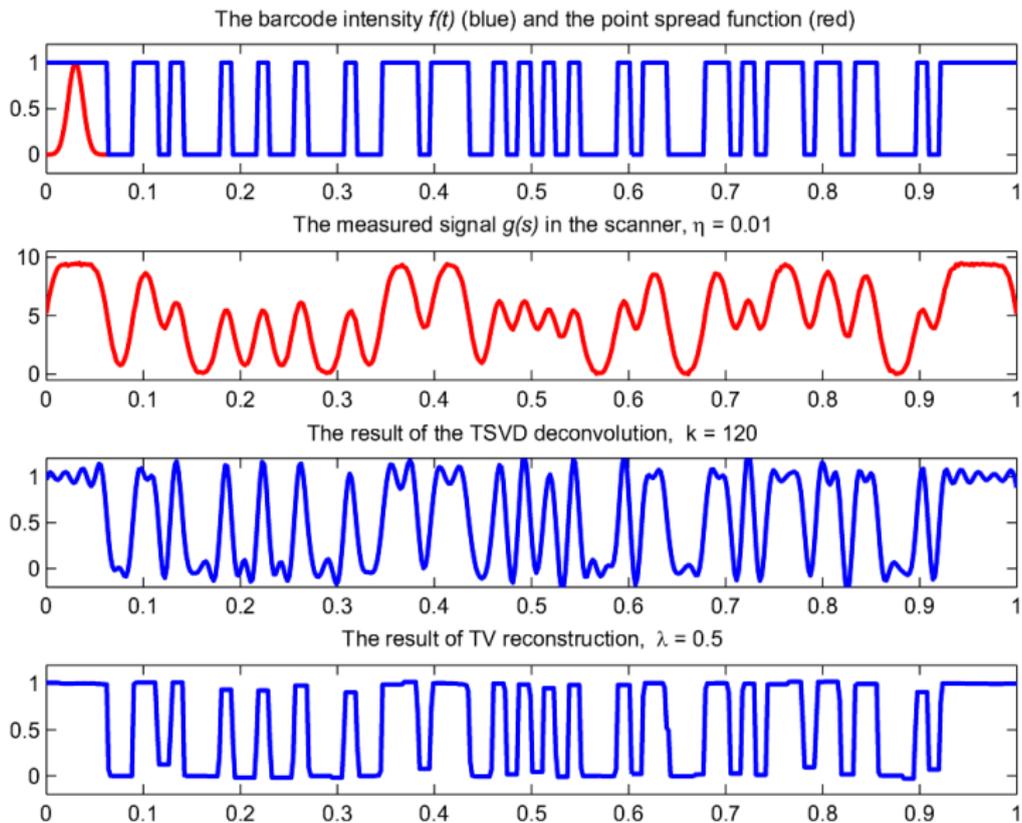

TV in 2D

In two dimensions, given a function $f(\mathbf{t})$ with $\mathbf{t} = (t_1, t_2)$, we use the gradient magnitude define as


$$|\nabla f| = \left(\left(\frac{\partial f}{\partial t_1} \right)^2 + \left(\frac{\partial f}{\partial t_2} \right)^2 \right)^{\frac{1}{2}},$$

to obtain the 2D version of the total variation $\|\|\nabla f\|\|_1$. The relevant norms of $f(\mathbf{t})$ are now

$$\|\|\nabla f\|\|_1 = \int_0^1 \int_0^1 |\nabla f| dt_1 dt_2 = \int_0^1 \int_0^1 \left(\left(\frac{\partial f}{\partial t_1} \right)^2 + \left(\frac{\partial f}{\partial t_2} \right)^2 \right)^{\frac{1}{2}} dt_1 dt_2,$$

$$\|\|\nabla f\|\|_2^2 = \int_0^1 \int_0^1 |\nabla f|^2 dt_1 dt_2 = \int_0^1 \int_0^1 \left(\frac{\partial f}{\partial t_1} \right)^2 + \left(\frac{\partial f}{\partial t_2} \right)^2 dt_1 dt_2.$$

An Example in 2D

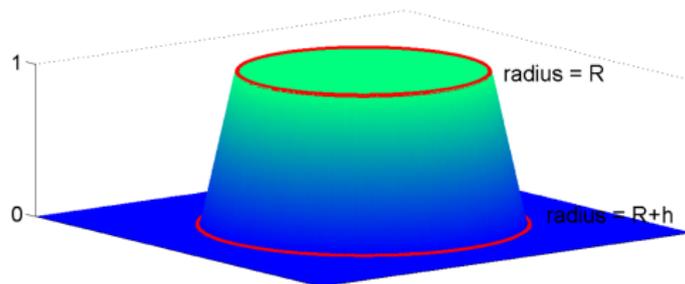

To illustrate the difference between these two norms, consider a function $f(\mathbf{t})$ with the polar representation

$$f(r, \theta) = \begin{cases} 1, & 0 \leq r < R \\ 1 + \frac{R}{h} - \frac{r}{h}, & R \leq r \leq R + h \\ 0, & R + h < r. \end{cases}$$

2D Example Continued

The function f is 1 inside the disk with radius $r = R$, zero outside the disk with radius $r = R + h$, and it has a linear radial slope between 0 and 1. In the area between these two disks the gradient magnitude is $|\nabla f| = 1/h$, and elsewhere it is zero.


$$\|\|\nabla f\|\|_1 = \int_0^{2\pi} \int_R^{R+h} \frac{1}{h} r \, dr \, d\theta = 2\pi R + \pi h$$

$$\|\|\nabla f\|\|_2^2 = \int_0^{2\pi} \int_R^{R+h} \frac{1}{h^2} r \, dr \, d\theta = \frac{2\pi R}{h} + \pi.$$

Similar to the one-dimensional example, we see that the total variation smoothing norm is almost independent of the size of the gradient, while the 2-norm penalizes steep gradients.

In fact, as $h \rightarrow 0$ we see that $\|\|\nabla f\|\|_1$ converges to the circumference $2\pi R$.

Total Variation Image Deblurring Example

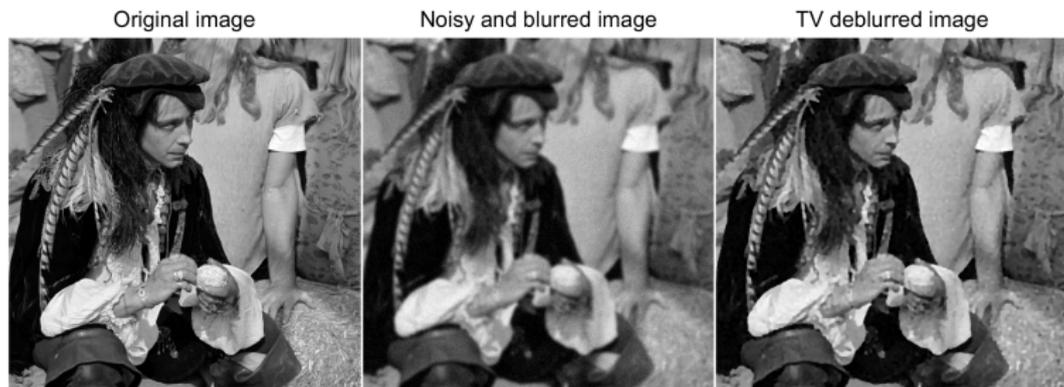

This example is from the paper:

J. Dahl, P. C. Hansen, S. H. Jensen, and T. L. Jensen, Algorithms and software for total variation image reconstruction via first-order methods, Numerical Algorithms, 53 (2010), pp. 67–92.

Total Variation Image *Inpainting*

Noisy and corrupted image



TV inpainted image, $\tau = 0.85$



The computational problem:

$$\begin{aligned} & \text{minimize} && \sum_{i=1}^{m-1} \sum_{j=1}^{n-1} \left\| \begin{pmatrix} X_{i+1,j} - X_{ij} \\ X_{i,j+1} - X_{ij} \end{pmatrix} \right\|_2 \\ & \text{subject to} && \| (X - B)_{\mathcal{I}} \|_2 \leq \delta, \end{aligned}$$

where \mathcal{I} denotes the index set of corrupted pixels.

Total Variation Image *Denoising* ($A = I$)

Original clean image



Noisy image



TV denoised image, $\tau = 0.85$



TV denoised image, $\tau = 1.2$

